

# Selkirk Masonry


## Landscape Product Guide



What can  
**you** build  
with **Selkirk?**

BUILD WITH  
**Selkirk**

Coastally Inspired, "Sorrento" Stone looks like its sounds - richly textured for less slip resistance resulting in a stunning ground effect that will turn heads.

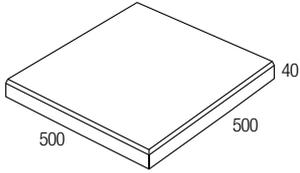

**Standard**

4 units per m<sup>2</sup>.

**Recommended for:**

Pedestrian (paths, patios, courtyards).



\*These pavers are not suitable for driveways unless adhered to a suitable concrete slab with an approved adhesive or wet bed method.



Sandstone




Bluestone



Mist



Millstone brings a touch of class to any outdoor area with its beautiful natural slate look whilst ensuring installation is both quick and simple

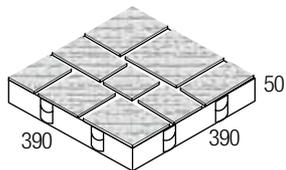

**3 Patterns supplied randomly**

6.57 units per m<sup>2</sup>.

**Recommended for:**

Pedestrian (paths, patios, courtyards).



**Exposure Grade**



Bluestone



Sandstone  
(Blended Colour)




Sunburnt  
(Blended Colour)




# Flagstone™

This large, square format paving range features simple, clean lines to enhance everyday living.

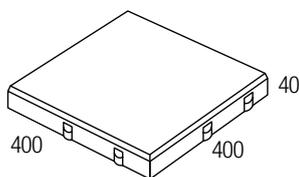

**400 Standard**

6.25 units per m<sup>2</sup>

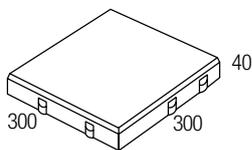

**300 Standard**

11.1 units per m<sup>2</sup>.

**Recommended for:**

Pedestrian (paths, patios, courtyards).



**Exposure Grade**



Bluestone




Oatmeal




# Arenapave & Urbanpave™

Standard small format pavers are a practical, affordable, and versatile choice offering easy installation and maintenance.




**Arenapave™ 200/40**

2 bevel  
25 units per m<sup>2</sup>



**Arenapave™ 190/40**

Square edge  
13.5 units per m<sup>2</sup>



**Urbanpave™**

2 bevel  
50 units per m<sup>2</sup>

**Recommended for:**

Pedestrian (paths, patios, courtyards) and Driveways. Urbanpave only suitable for driveways.



**General Purpose**



Bluestone



Clinker Red



Oatmeal



Sandune



Warmstone


Note: Clinker Red only available in Arenapave 200x200




## Patterns




Stretcher Bond




Basketweave



Stacked bond 45°




Stacked bond 90°



Stretcher Bond




Herringbone 45°



Herringbone 90°

Selkirk recommends that even pre-sealed pavers be resealed with a quality penetrating sealer following installation.

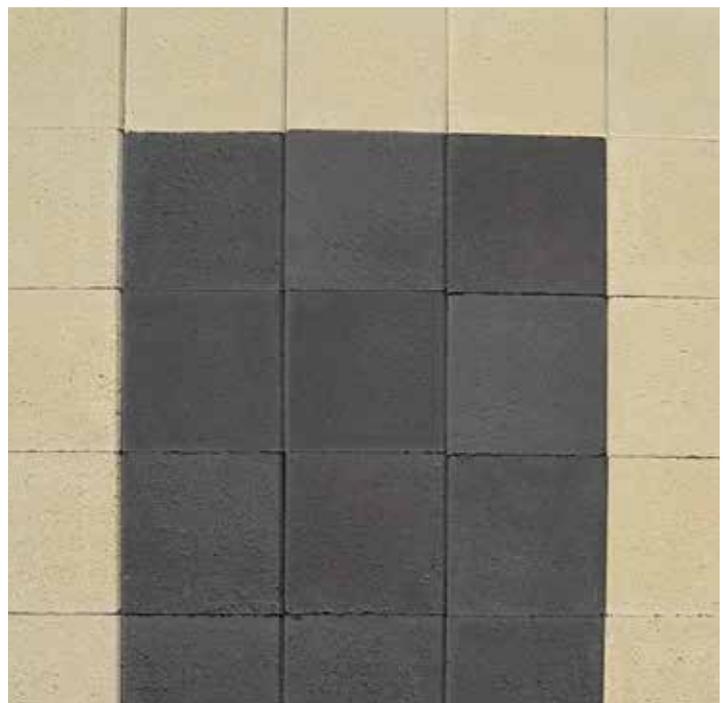

# Pavers

Type	Colour selection	Application	No per tonne	Units per sq metre	Units per pallet	Weight per unit (kg)
<b>Sorrento Stone™</b>						
500x500x40 	Bluestone, Mist, Sandstone		55	4	48	18
<b>Millstone™</b>						
3 Patterns supplied randomly 	Bluestone, Sandstone (Blended Colour), Sunburnt (Blended Colour)	 	64	6.57	90	15.7
<b>Flagstone™</b>						
300 Standard 	Bluestone, Oatmeal		130	11.1	192	7.7
400 Standard 	Bluestone, Cocoa, Ginger, Oatmeal, Terracotta, Vanilla		74	6.25	108	13.5
<b>Urbanpave™</b>						
200x100x50 (2 bevel) 	Bluestone, Sandune, Warmstone, Oatmeal	 	455	50	750	2.2
<b>Arenapave™</b>						
200x200x40 (2 bevel) 	Bluestone, Clinker Red, Warmstone, Oatmeal, Sandune		285	25	450	3.5
190x390x40 (square edge) 	Bluestone, Warmstone, Oatmeal, Sandune		137	13.5	216	7.3



# How to choose pavers

## Step 1

Gather ideas on the look you want to achieve. Ask one of our agents for further assistance and advice.

## Step 2

Find the paver that is recommended for your particular need.

## Step 3


Measure your area to be paved to determine quantity of pavers required. This area is simply calculated by length (m) x width (m) = area (m<sup>2</sup>) for basic square or rectangular spaces (m= metres).



For odd shapes, break your area into sections.



For triangular areas:

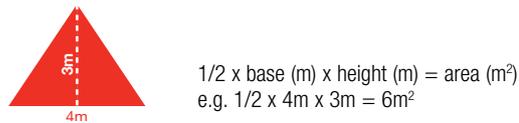

(Allow up to 10% extra pavers for wastage such as cuts and breakages.)

## Step 4

Select the paver size you prefer. Large format pavers are larger than or equal to 300mm (length) x 300mm (width) and small format pavers are less than 300mm x 300mm.



Your choice will depend on the look you wish to achieve as per Step 1.

## Step 5

Select a colour that complements your area, home and surroundings.



## Step 6

Choose to D.I.Y. or hire a professional contractor.

This is general information and should be viewed as a guide only. We urge you to ensure that you obtain appropriate professional advice tailored to your circumstances before commencing paving projects.



## General Tips

### Tip 1

Select pavers that match internal floor coverings to ensure the transition from indoor out is subtle and blends with your decorating style.

### Tip 2

Combining large and small format pavers can add textural qualities for a more distinctive space.

### Tip 3

Paving joint mortar saves time, effort and water and is ideal for applying a permanent, rigid joint more than 5mm wide and a minimum 25mm deep on all types of paving.

### Tip 4

When paving a small space keep the design simple and use a neutral coloured, large format paver to create a sense of space.

### Tip 5

We recommend that concrete pavers be sealed with a quality penetrating sealer following installation.

# Basic guide to laying pavers



## Prepare the site

Excavate the area to be paved to allow for the base layer (generally 100 -150mm thick of stabilised crushed rock), bedding Sand (generally 30mm thick coarse washed river Sand) and the paver thickness. Establish falls and level using a spirit level on the screed board. Spread the stabilised crushed rock to an even thickness and compact using a mechanical plate compactor.



## Add the bedding Sand

Place screed rails on stabilised crushed rock and spread bedding Sand roughly between and over the rails – keep the rails. The easiest way to screed Sand is to use two guides (screed rails) and a screeding board (e.g. a flat piece of timber). Establish bedding tracks with the screeding board.



## Level the surface

Bed the screed rails into the bedding Sand. Drag the screeding board in a sawing motion from side to side across the rails to create a firm, flat laying surface. Remove the rails, fill in the voids with bedding Sand and trowel smooth.



## Set the lines

Set string lines at right angles to establish paving lines. These will help keep the joints straight for that truly professional look.



## Begin the laying

Start laying along the longest straight edge of the designated area and lay whole pavers first. Leave 3-5mm between pavers to allow for jointing Sand (unless the pavers have nibs).



## Cut pavers

Cut and position part-pavers if the job requires them. Edge restraints prevent the pavers from moving.



## Fill the joints

Sweep jointing Sand over the finished dry paving, ensuring that all joints are full.

\* For Heavy Applications of paving such as crossings or driveways please refer to [cmaa.com.au/paving](http://cmaa.com.au/paving) for further information.

## Sealing

We recommend that all pavers should be sealed with a quality penetrating sealer following installation. Please check with a qualified trades person for advice on this process. We do not accept liability for stained or damaged pavers.

\*\* For Millstone pavers, we recommend a semi-penetrating sealing to aid gap Sand adhesion.

This is general information and should be viewed as a guide only. We recommend you obtain professional building advice on your specific paving project.

## Caring for your pavers - prevention is better than cure

- Sweep regularly with a stiff bristled broom to keep pavers free from debris.
- For maximum protection we suggest pavers are sealed after installation with a penetrating sealer. Please check with a reputable sealing company for advice.
- Seal pavers with a penetrating sealer before grouting to avoid grout smears.
- Re-seal pavers as required paying extra attention to heavy wear areas and salt-water locations.
- During construction, cover the paved areas to protect against damage.
- Protect your pavers against possible staining from mortar, oxides, cement and rust.
- Do not use acid to clean pavers.
- Do not use high pressure cleaning apparatus to clean pavers.
- In all cases, attempt to clean a stain before it hardens or dries.

If a stain occurs, follow some simple steps:

- Assess type of stain carefully before taking action (incorrect assessment of stain can cause the stain to be more difficult to remove).
- If stain cannot be accurately assessed, conduct a trial process on a small portion of stained area to determine most appropriate action.
- Do not use acid to remove stains under any circumstances. Refer to the guide beside for some stain removal solutions.

PROBLEM	SUGGESTED CLEANING METHOD
Efflorescence* (White powdery deposit)	Use Environex Anti-EFF or equivalent as per manufactures recommendation.
Leaves, bark, algae, food and wine stains	Use 10 part water to 1 part bleach, then hose <sup>^</sup> down.
Chewing gum	Freeze with dry ice and remove with a spatula.
Ivy suckers	Apply a heat gun to the suckers until they go hard. Allow them to cool and dry, then scrub them off with a stiff bristled broom.

\* Efflorescence occurs naturally in cement based products.

<sup>^</sup> Subject to water restrictions in your area.



CAMPBELLFIELD:	1596 Sydney Rd	Ph: 9359-6028
GREENSBOROUGH:	297 Diamond Creek Rd	Ph: 9434-6744
MORDIALLOC:	80 Governor Rd	Ph: 9580-1080
TAYLORS LAKES:	43 Melton Hwy	PH: 9390-8100



Product Disclaimer

Concrete Blocks, Bricks, Pavers and Retaining Wall products supplied by Selkirk are manufactured using raw materials that inherently vary in nature. Whilst all effort is made to produce uniformity in our range of products, variation in colour, texture, and finish can be present. The dimensional characteristics of all products are nominal and variations in length, height, and width can occur from unit to unit which needs to be

Colour variations occur from batch to batch. Colours shown are indicative only and should not be used for final selection. Products ordered should be chosen from actual samples current at the time of order and are subject to availability. Samples, brochures and displays should be viewed as a guide only. Customers should ensure all delivered products are acceptable, and any concerns about products are made prior to laying.

All prices are subject to availability and can be withdrawn or varied without notice.

© Copyright – all rights reserved 2013.

NAT0096 29/07/15